



FEATURES & **SPECIFICATIONS**





Sales, Service and Rentals

705-682-2084 Sudbury 705-360-5177 Timmins 705-844-2598 Spanish Argentina +54-264-4233838

Mexico







CARRIER FEATURES AND COMPONENTS

SPECIFICATIONS

- Radial piston air motor, 30hp @1200 rpm, 116psi & 890cfm air delivery
- Tandem gear hydraulic pump, 1.91 cu. in. per rev. @3000psi
- High quality proportional directional control valves
- High quality motion control and cross-port check valves
- Two lever pilot (low) pressure tethered remote tramming valve
- Skid steering with independent port and starboard wheel drives
- Planetary 4 wheel hydraulic drive with fail-safe brakes
- 4 independent heavy duty jacks with load lock (cross port check) valves for leveling
- Tow-bar and dis-engaging wheel drives for towing
- 135-degree drill position dump from horizontal transport position to 45-degree overcenter positioning with high quality rotary actuator (see below)
- Side to side hole positioning of 66" [168cm] on a 5-foot traverse with telescopic cylinder
- Side to side hole positioning of 90"[229cm] on a 7 foot optional traverse with telescopic cylinder
- 360-degree radial drill feed positioning with high quality rotary actuator
- 180 degree pivoting drill feed positioning for maximum reach on left and right with high quality rotary actuator

















CARRIER DIMENSIONS

TRAMMING, TOWING, AND SHIPPING

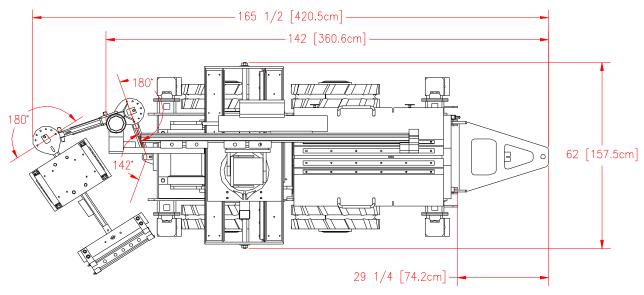

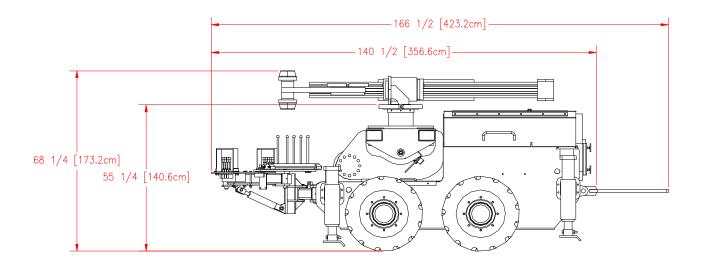



DRILLING

